

**Competitive
price**

Long cell lifespan

Made in EU

**Easy and convenient
installation**

**Safety and
operational stability**

**Technical
support**



Capacity
15 kWh



Voltage
48 V



Fast
delivery




Independent
energy
infrastructure



Home
emergency
power supply



Safe
LFP cells

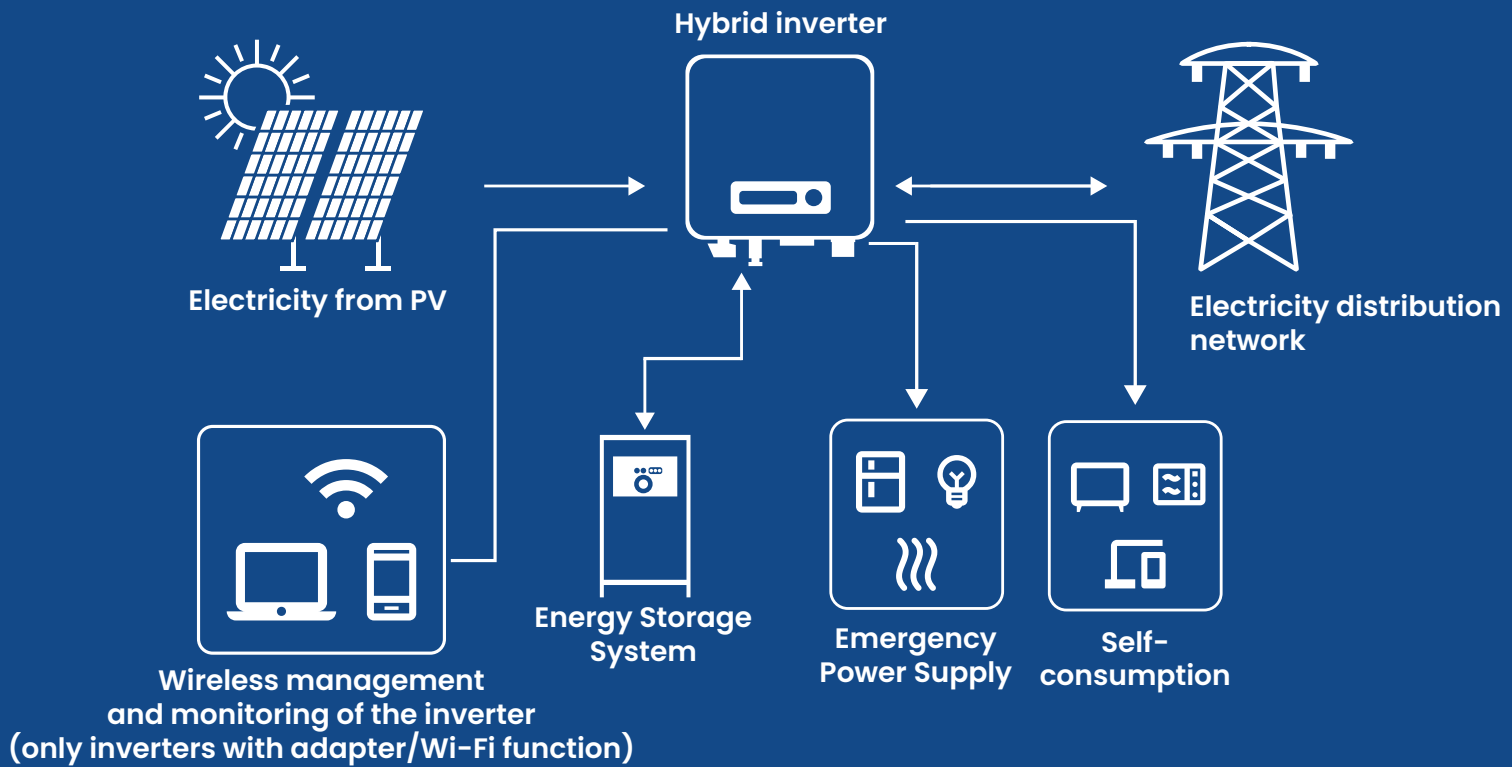

LFP cells*	3,2 V, 100 Ah
Cell configuration	16S3P
Nominal voltage	48 - 57,6 V
Operating voltage	51,2 V
Gross capacity	300 Ah
Capacity	15 kWh
Discharge temperature	-20 - 50 °C
Charging temperature	0 - 50 °C
Max charging/discharging current	200 A
Number of cycles	>4000
Communication	Deye, Pylontech, Growatt, Victron Goodwe, Sofar, Megarevo, INVT, GoodWe, MUST, LuxpowerTek, Voltronic,**
Dimensions	725x290x590mm (w x d x h)
Weight	(approx.) 120 kg
Certification	CE EN 61000-6-2: 2005/AC:2005 EN 61000-6-3: 2007/A1: 2011 EN 61000-3-2: 2014 EN 61000-3-3:2013 EN 62040-1: 2008/A1:2013

* Cells sourced from upcycling have undergone verification tests. The manufacturer guarantees a lifespan of at least 10 years for the cells.

** Inverters compatible with PylonTech

✉ contact@batterypartners.eu

☎ +48 600 905 897

🌐 batterypartners.eu