

**Competitive
price**


Long cell lifespan

Made in EU

**Easy and convenient
installation**

**Safety and
operational stability**

**Technical
support**

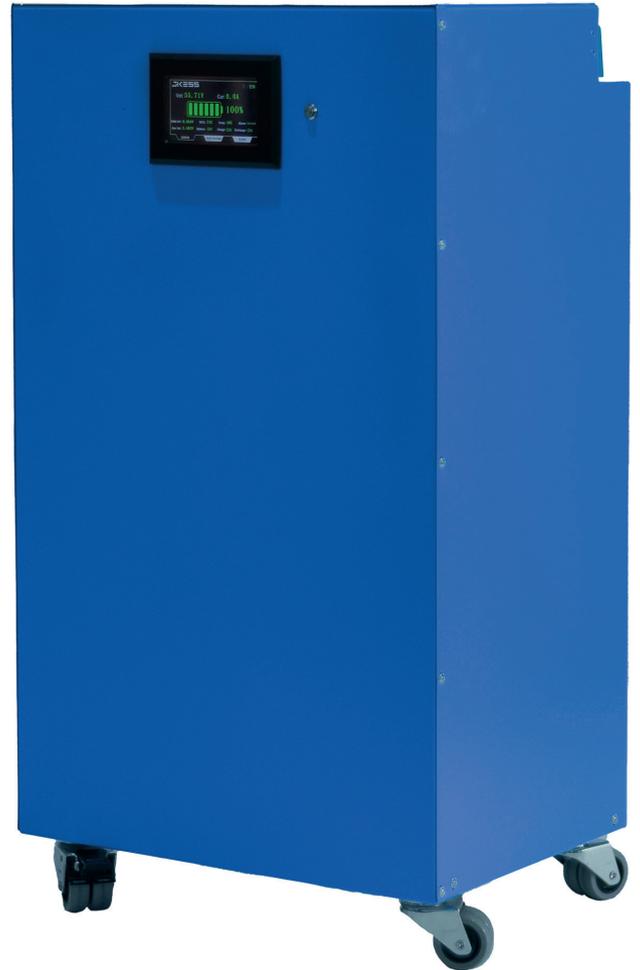

Capacity
17 kWh



Voltage
51,2 V



Fast
delivery




Independent
energy
infrastructure



Home
emergency
power supply



Safe
LFP cells

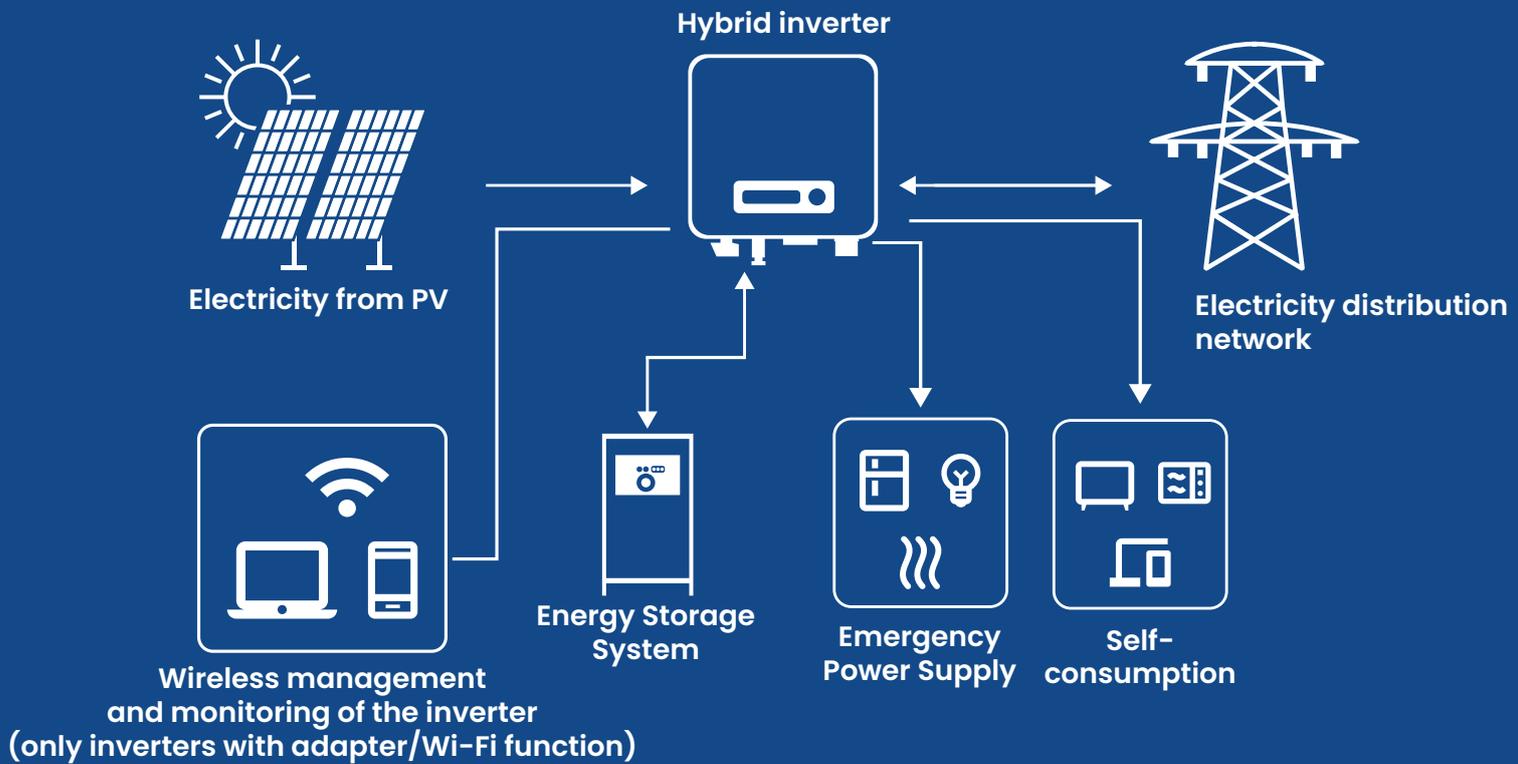

LFP cells	REPT
Cell configuration	16S1P
Nominal voltage	48 - 57,6 V
Nominal operating voltage	51,2 V
Recommended power	6,4 kW
Capacity	17 kWh
Discharge temperature	(-20 - 35) °C
Charging temperature	(0 - 35) °C
Max charging/discharging current	150 A
Number of cycles	>8000
Communication	Deye, Pylontech, Growatt, Victron Goodwe, Sofar, Megarevo, INVT, GoodWe, MUST, LuxpowerTek, Voltronic,*
Dimensions (w x d x h)	725x290x590 mm
Weight	125 kg
Certification	CE EN 61000-6-2: 2005/AC:2005 EN 61000-6-3: 2007/A1: 2011 EN 61000-3-2: 2014 EN 61000-3-3:2013 EN 62040-1: 2008/A1:2013

* Inverters compatible with PylonTech

✉ contact@batterypartners.eu

☎ +48 600 905 897

🌐 batterypartners.eu